


# CROSSFLOW FILTER SET UP

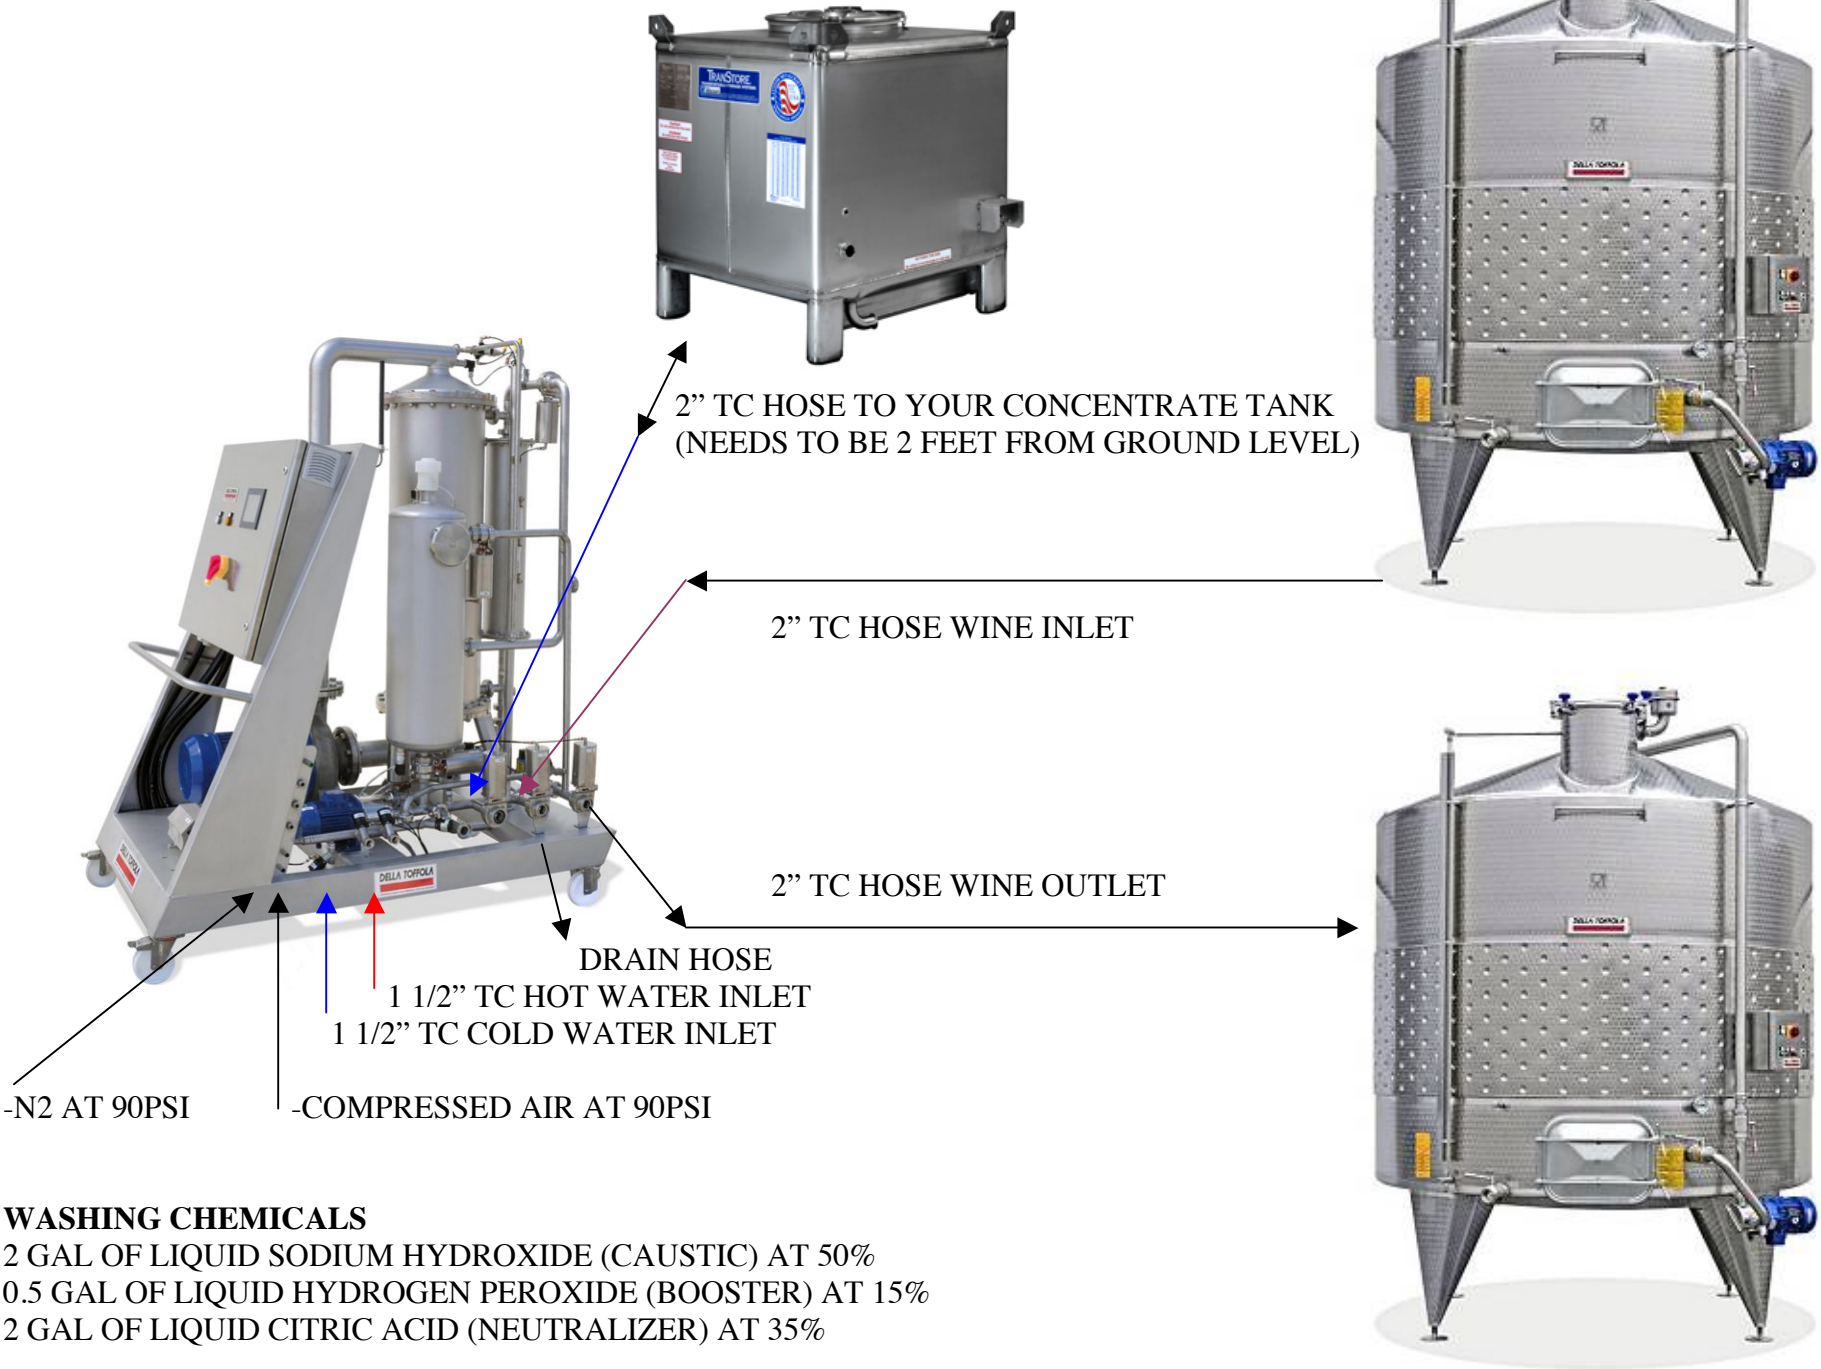

## **WASHING CHEMICALS**

- 2 GAL OF LIQUID SODIUM HYDROXIDE (CAUSTIC) AT 50%
- 0.5 GAL OF LIQUID HYDROGEN PEROXIDE (BOOSTER) AT 15%
- 2 GAL OF LIQUID CITRIC ACID (NEUTRALIZER) AT 35%